



CAMPBELL HAUSFELD Compressors



**2 HP
11 GAL.
CAST
IRON
SERIES**

Maximum pressure: 125 PSI. Delivers 5.4/4.8 CFM at 40/90 PSI. 115V circuit. Cast iron compressor. 15 ft. air hose and tire chuck included. #V54011 (4115515)


\$263

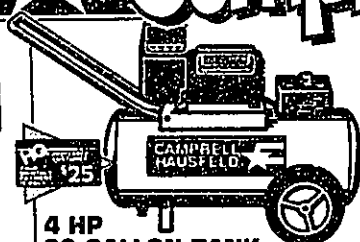

**4 HP
20 GALLON TANK**

Maximum pressure: 125 PSI. Delivers 8.1/6.3 SCFM at 40/90 PSI. Runs on 120 volt circuit. Direct drive oilless pump. Cool running compressor pump. Built-in regulator included. #WL6021 (4473542)

\$299

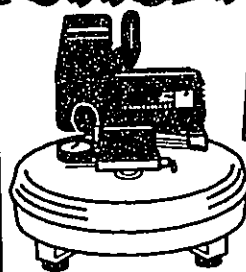

4 gallon pancake tank. Maximum pressure: 125 PSI. Delivers 5.6/4.4 CFM at 40/90 PSI. Direct drive oilless pump. Runs on 120 volt circuit. Regulator & gauge included. Only draws 15 amps. #WL5043 (4418083)

**Professional
1 1/2 HP 4 Gallon
AIR COMPRESSOR**

\$294



**BUYER
PROTECTION
PLAN**
Available on all
COMPRESSORS

CAMPBELL HAUSFELD For The DO-It-Yourselfer!



**3/8 Inch
AIR RATCHET**

Tightens & loosens bolts. Maximum torque: 45 ft. lbs. Free speed: 130 RPM. Requires 2.0 CFM at 90 PSI. 1/4" NPT air inlet. #VL501 (4180121)

23⁷⁸



**1/2 Inch
IMPACT WRENCH**

Requires 2.0 CFM at 90 PSI. 1/2" NPT air inlet. #VL1002 (4180131)


28⁹⁸



**Mini Die
GRINDER**

Requires 9.0 SCFM at 90 PSI. 1/4" NPT air inlet. PC collet design with front exhaust for light to medium duty grinding. #VL1070 (4465335)


17⁹¹

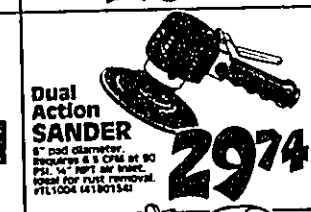

**Dual Action
SANDER**

8" pad diameter. Requires 6.5 CFM at 90 PSI. 1/4" NPT air inlet. Ideal for rust removal. #VL1004 (4180134)

29⁷⁴

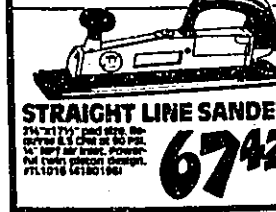

STRAIGHT LINE SANDER

21A" x 17 1/2" pad size. Requires 4.5 CFM at 90 PSI. 1/4" NPT air inlet. Power-fed roller platen design. #VL1076 (4180136)

67⁴²



CUT-OFF TOOL

Great for auto body work. Includes 8" dia. cutting wheel. Requires 14.0 SCFM at 90 PSI. 1/4" NPT air inlet. #VL1055 (4455453)

34⁸¹


CAMPBELL HAUSFELD For The Professional!



**3/8 Inch
AIR RATCHET**

Tightens and loosens bolts in hard-to-reach areas. 50 ft. lbs. of torque. 8.0 CFM at 90 PSI. 1/4" NPT air inlet. #VL1501 (4180220)

49⁷⁷

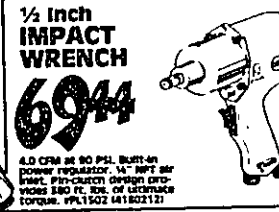

**1/2 Inch
IMPACT WRENCH**

4.0 CFM at 90 PSI. Built-in power regulator. 1/4" NPT air inlet. Pre-cutting design provides 880 ft. lbs. of maximum torque. #VL1502 (4180221)

69⁴⁴



**1/2 Inch
Reversible
DRILL**

For drilling, honing, reaming, hole sawing & wire brushing. 500 RPM. 4.0 CFM at 90 PSI. 1/2" NPT air inlet. With 1/2" Jacobs chuck and key. #VL1546 (4417933)

74⁸¹



**Automotive
SPRAY GUN**

Sprays latex, enamel, lacquer, stain or acrylic. Quick release drip-proof canister makes clean-up quick and easy. #VL1500 (4170460)

39⁹⁷



**3/8 Inch
Reversible
DRILL**

Delivers 3,500 RPM. 4.0 CFM at 90 PSI. 1/4" NPT air inlet. Includes 1/8" Jacobs chuck and key. #VL1543 (4417978)

49⁵⁰



**3/4 Inch
IMPACT WRENCH**

1/4" square drive. 1" bolt capacity. 7.3 CFM at 90 PSI. 1/4" NPT air inlet. 800 ft. lbs. of maximum torque. #VL1534 (4417937)

123⁵⁰